



ONE STOP SOLUTION

For All Solar Product



For Solar Module :+91 90811 00296 For C & I Solar BOS :+91 78618 68278 For Solar BOS :+91 78618 13600



www.heavengreenenergy.com



OUR TEAM

- A passionate team at Heaven Green Energy Ltd. has come together to contribute to the enhancement and development of the planet. Due to the increased use of fossil fuels, the Earth's climate is changing, and the temperature is rising day by day. A huge amount of coal and crude oil is burned daily to fuel the economy. To preserve the Earth's natural environment for future generations, we are on a mission to make this planet green again.
- Innovation and best-quality services are our primary motto. As a team of young entrepreneurs, we strongly believe that Indian youth is a treasure house of immense energy and holds the power to develop the economy with effective and reliable solutions.

<u>VISION</u>

- There is no doubt that humanity is facing climate change on many fronts. Many governments, organizations, companies, and individuals are trying to decelerate and potentially even reverse the process of global warming that is threatening the world as we know it today.
- These pioneers are looking to emerging green technologies, practices, and social transformation in order to succeed in the battle against climate change To become leading company in field of renewable energy by providing green energy solution to each household and industry.


MISSION

Our mission is to make India a 100% renewable energy country.

VALUE

Honesty, transparency, and growth for everyone.



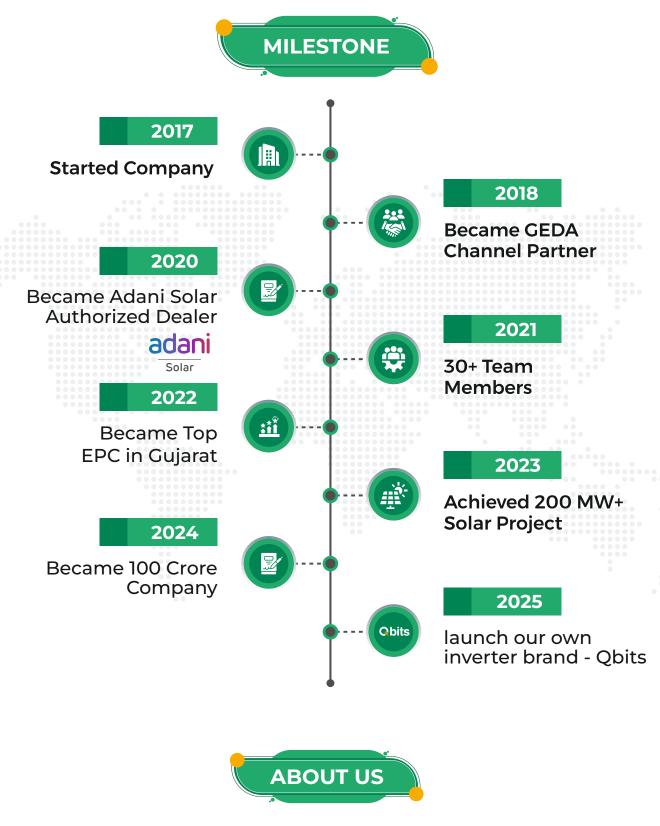

Heaven Green Energy Ltd is a globally reputed solar engineering consultancy operating in Indiasince 2017 With a 300MW+ of global experience in Design & Engineering, having team of over 42+highly-qualified engineering and solar experts.

Heaven Green Energy Ltd is an authorized distributor of Adani Solar, Havells Inverter, and EVVO inverter. We also supply structures, walkways, cables, and all BOS related to solar power plants through our market place platform.

OFFICIAL CHANNEL PARTNER

ADANI SOLAR PV MODULE

520 to 545 WP Mono PERC Half cut & BiFacial

- MBB cell technology with 10BB, Smart Soldering
- High module conversion efficiency upto 21.19%
- 144 Half-cut mono-crystalline, P-type PERC monofacial solar cells; MBB bus bars
- Temperature range: -40°C to +85°C
- 12 Years Product & 30 Years Performance warranty

550 to 575 Wp Topcon Bifacial Transparent Backsheet Modules

- MBB cell technology with 10BB, Smart Soldering
- High module conversion efficiency upto 22.28%
- N-type Bifacial 144 Half-cut cell
- Temperature range: -40°C to +85°C
- 12 Years Product & 30 Years Performance warranty





QBITS INVERTER

Single Phase

3.6,4,5,6,8,10,12,15,20,25,30KW

Three Phase

5 to 30, Upto 100 & Many More



- Maximum Efficiency: 98.2%
- IP-66 High Pressure waterproof, (Can resist harsh, dust environments, C5 anti-corrosion.)
- App quick commissioning & Remote configuration and upgrade
- PROTECTION_ AC overcurrent protection, AC short circuit protection,
 Arrester, Insulation detection, Leakage current protection
- Supports 50% DC overload,
- Communication : WiFi / RS485 & GPRS (Optional)
- Warranty: 12 years
- 20A MAX current Capacity
- Common Storage available for better monitoring record



HT VCB Panel (11 KV VCB)

Application : Protection

Standard : Confirming Indian
 Electricity Act and standards of all component

Type : Outdoor IP 65

Phase: Three phase

Automation Grade: Automatic

Operating Voltage: 11kV

Bus Bar : Aluminium or CopperDegree of Protection : IP42/54

Enclosure : Fabricated from CRCA

Switchgears:L&T/ABB/Schneider/reputed




FRP WALKWAY

Material Grade: FRP fiber glass

Size: 270 / 310mm x 3660mm standard
 Thickness: 15,25,30,38,40,50 mm

Color: Yellow Strong, Light weight, Durable,

excellent corrosion and rust resistance

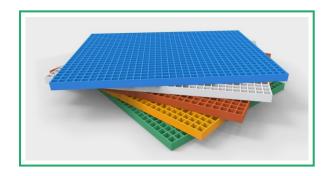

CONDUIT PIPE & ACCESSORIES

- Application: Used to make High Viscosity Liquids
 Flow At Elevated Temperature Through The Carrier
 Pipe
- The Inner Pipe Is The Primary Or Carrier Pipe And The Outer Pipe Is Called The Secondary Pipe.
- Size Range:- 32/40 mm, 38/50 mm, 51/63 mm, 63/77 mm, 75/90 mm, 95/110 mm
- Color: DWC pipes can be black or orange
- Greater strength and offer better load bearing capability.
- DWC pipes have a dust proof joint and are waterproof
- Offer a very high resistance to corrosion
- DWC pipes Joints & Fittings : Couplers Snap-fit, Elbow / Bend, Tee, End caps



CABLES

DC Power Cables

- Standard: En50396
- Type of product: Flexible tinned copper conductor cables
- Generally conforming to National/International standards
- Weather resistant & UV resistant, Resistant to acids & alkaline.
- Low smoke emission & low toxicity/corrosivity during fire
- Full protection against ultraviolet rays
- Ambient temperature: -40°C to +90°C
- Fast & Easy installation with color identification.
- Cross Section: 2.5/4/6 Sq.mm (Redblack/Black)
- Rated DC Voltage: 1.5 KV



AC Power Cables

- Standard: IS 1554-1&2/IS7098 1&2
- XLPE/PVC Power cables for 1.1 & 3.3 kv for Electrical Substations
- Single Core 10-1000 sq. mm & Multicore 6-630 sq. mm
- Type of the Conductor: Stranded / Solid, Circular / Shaped Aluminium / Copper
- XLPE Insulated cable: Higher current rating and emergency overload rating, low dieelectric loss, Much better insulation resistance, Resistant to chemical & corrossive gases, Much longer life of cables
- PVC Insulated cable: High dieelectric strengh & resistance to DC voltage effects,
 High mechanical strengh & resistance to abrasion + vibration, Resistant to most acids + alkalies + liquid fluids
- Cable Section: During Detail design
- Voltage: 1100V AC



EARTHING KIT

Design of Earthing System (AS per IS, IEEE, IEC & UL Standard)

- ERT (Earth Resistivity Test)
- Soil Investigation.
- Earthing Grid, Mesh, Touch & Step Potential
 Calculation as Per IEEE- 80-2013 Standard.
- Design of 66/132/220/400 and 725 KV Sub Station Earthing System. Manufacturing of maintenance Free Advanced Earthing System





- Flat In Pipe OR Pipe In Pipe Earthing Electrode
- Ground Conductive Improve Material® (GCIM®)
- Versatile Earthing System
- Lightning Protection System

FIRE SAFETY & LABOUR SAFETY

- Products are designed to cover basic safety aspects as well as extra protection application
- Fire extinguisher A, B, C type and CO2 based
- Fire bucket stand and fire Fire extinguisher stand
- Safety belt scap hook shock absorbers _ 2 Mtr. Length







MODULE MOUNTING STRUCTURE _ MMS


Ground Mounted Structures

- Type of Structures: Fixed Tilt & Manual Tilt
- Tilt Angle: Depends on The Latitude
- Module Orientation: Portrait & Landscape
- Wind Speed: Upto 225 km/hour
- Material: HDGI, Posmac & Galvalume



Rooftop Structures

- Type of Structures: Double Pole Structure
- Tilt Angle: 0-40 Degree or Depends on the Latitude
- Module Orientation: Portrait & Landscape
- Wind Speed: Upto 225 km/hour
- Material: HDGI. Posmac & Galvalume



Flush Mounted Rail & Elevated Structures

- Type of Structures: Flush Mounted and Tilted Structure
- Module Orientation: Portrait & Landscape
- Wind Speed: Upto 225 km/hour
- Material: AL 6063 and AL 6061 Anodized
- Mounting Type: By Self Drilling Screw, Rivet & Adhesive



TARIFF METER



EM101+, ER300P Tariff meter

- Measure kW and kVA along with date and demand integration period is 30 min
- Measures instantaneous parameters such as Voltage, phase and neutral current, active and apparent power, power factor and frequency
- (6+0) digits backlit display & (2-4) digits high resolution display

ABT METER



Two Port ABT Meter - ER300P

- kVAh, kWh, kVArh lag, kVArh lead, phase wise voltages and currents
- Multi level password for data reading and programming
- Electrically isolated optical port as per 1515959/IEC62056-21 (DLMS, CAT B)
- RS 232/RS 485. as optional communication interfaces
- DLMS as per IS15959 and MODBUS (For RS485) protocal supported
- Missing Potential, Voltage related tampers, Current related tampers, Low Power Factor, Meter Cover Open, Abnormal Magnetic influence, Wrong phase sequence detection
- Ultrasonic welding available for temper proof provision

OTHER BOS



SS CABLE TIE



U BOLT



WIRE AC



WIRE DC



SELF DRILLING SCREW



MCB



SPD



J BOLT



MID CLAMP



END CLAMP



P ANCHOR FASTNER PRODUCT



Mc4

OTHER BOS



PVC PIPE



BOX PIPE



MONORAIL



ZINC SPRAY



WIRE TAP



CABLE TRAY



LUG



ACDB



DCDB

VALUABLE CLIENTS





- Quality Products
- Standard Quality Check
- Best In Class Product Design
- High Quality Material Used
- © Competitive Pricing
- Faster Delivery

BRAND WE WORK WITH





















HEAVEN GROUP OF COMPANIES



















WHY YOU SHOULD GO FOR SOLAR TODAY?



Reduce Your Manufacturing Costs

Lower your energy expenses and improve your bottom line with solar power.



ROI in Less Than 4 Years

Enjoy a quick return on investment with significant long-term savings.



Up to 80% Loan with Interest Subsidy

Take advantage of favorable financing options with interest subsidies.



Tax Depreciation Benefits

Benefit from tax incentives that make solar even more cost-effective.



Highest Return Generating Asset

Solar is a reliable and high-return investment for your business.



Save the Environment and Give Back to Society

Contribute to a greener planet and a better future for all.



